



ALSEAL


Stick to Alseal's Quality



Fire Door / Windows Perimeter



Drywall Sealing

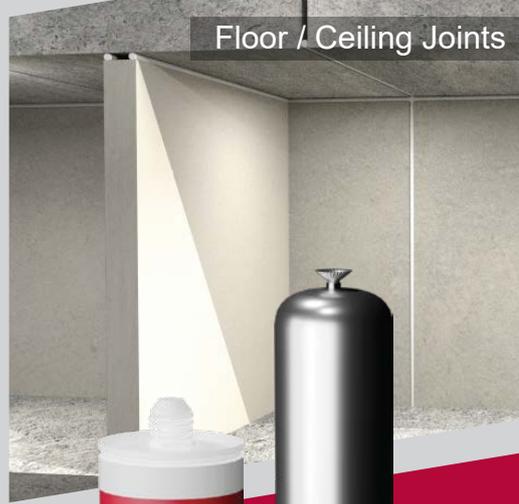

Floor / Ceiling Joints



AS-1001 Fire Retardant Gaps Sealer

ALSEAL Fire Retardant Gaps Sealer is a one-component, acrylic-based firestop sealant designed to provide movement capability in fire-rated joint applications. Tested and certified with a 4-hour fire rating under BS EN 1366-4:2006, this sealant offers reliable fire protection. It forms a durable, flexible rubber upon curing through water evaporation.

Applications:

Ideal for indoor fire-rated joint applications, including sealing joints between walls and ceilings, and perimeter sealing of fire doors and windows. Offers excellent adhesion to a wide range of construction materials including concrete, brick, painted wood, and aluminium.

Approvals / Specifications:

- ▶ BS EN 1366-4:2006 Fire Resistance Tests
- ▶ AS 1530.4:2014 Methods for Fire Tests on Building Materials
- ▶ ASTM C920, Type S, Grade NS, Class 20, Use NT, M & A
- ▶ Good Environmental Choice Australia (GECA) certified
- ▶ Low VOC - USEPA Method 24 under SCAQMD Rule 1168

Available colours: White, grey & red

Product Code	Content	Carton Quantity
AS-1001	450 g / Cartridge	24 / Carton
AS-1001S	900 g / Sausage	20 / Carton
AS-1001-15K	15 kg / Pail	-



Features:

- ✓ 4-hour fire rating
- ✓ Smoke, fume, and water resistant
- ✓ ±20 % movement capability
- ✓ Non-halogenated
- ✓ Non-corrosive to metals
- ✓ Virtually odourless
- ✓ Easy clean up